





A PLAYCORE Company

Left ADA

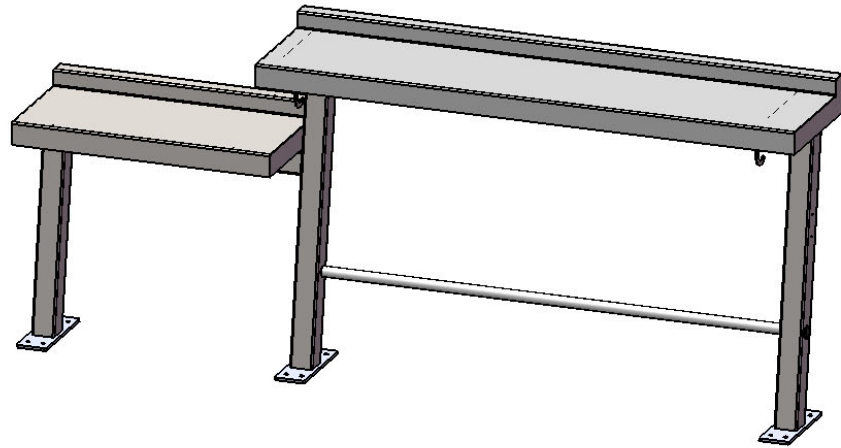

Right ADA

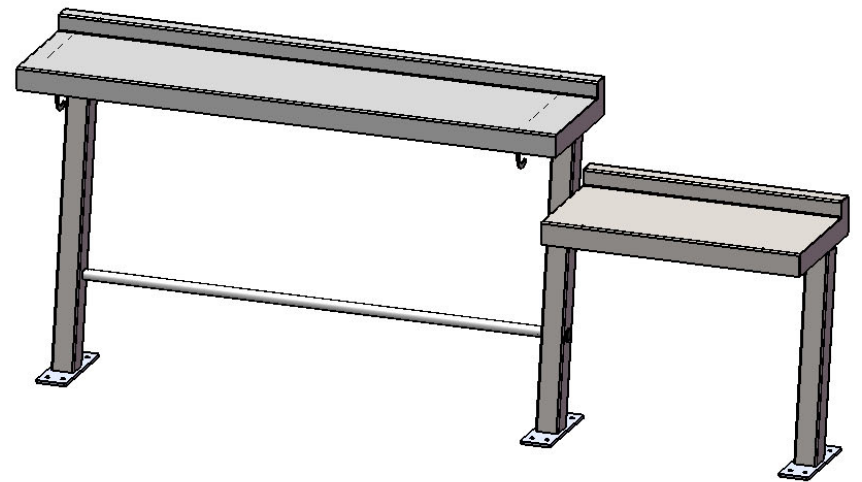

Model # 340SMH-SD6



A PLAYCORE Company

1675 Locust Street
Red Bud, IL 62278
Phone: 618-282-8200
Fax: 618-282-8202

WARRANTY & TERMS

WARRANTY: 5 Year Limited Warranty on Thermoplastic coated elements. Ultra Play guarantees all items for one full year to be free of defects in workmanship or materials when installed and maintained properly. We agree to repair or replace, any items determined to be defective. Items specifically not covered by this warranty include vandalism, man made or natural disasters, lack of maintenance, normal weathering or wear and tear due to public abuse.

Damages or loss in transit is the responsibility of the carrier, whether visible or concealed. It is the responsibility of the recipient to assure that the order is received complete. Before signing the delivery receipt, inspect the shipment immediately and completely. Note any damages or shortages on the bill of lading. Damage reports must be filed within 5 days. Ultra Play is NOT responsible for damages or loss in transit. Title to all goods passes to the customer at the time of shipment. Ultra Play will assist in filing claims if the freight arrangements were made by Ultra Play at your request.

CANCELLATIONS AND RETURNS: Cancellations are only accepted with approval of Ultra Play. No merchandise shall be returned without a Return Goods Authorization number which is issued by customer service. Any authorized merchandise must be carefully packed and received in saleable condition. A restocking charge of up to 25% will be applied to all returned goods when the error is not the fault of Ultra Play. All returns must be shipped freight prepaid.




A PLAYCORE Company

SAFETY WARNINGS & EQUIPMENT INSPECTION


- Owners and installers please note these safety warnings and make use of this checklist on a regular basis.
- Follow installation instructions when erecting equipment.
- Ground surfaces around equipment should be restored as needed. Concrete footings should never be exposed. Surface depth should comply with ASTM and CPSC specifications.
- Check for and repair damage caused by wear or vandalism, a major factor in injury causing situations.
- All protruding bolts should be covered or cut off and finished smooth. Sharp edges on pipes should be capped or removed. Check for bent, broken, or severely worn pipe, and replace.
- All equipment should be free of rust and repainted whenever necessary to deter rusting.
- We provide our customers with layout sheets and installation instructions. Please keep on file the specifications sheet that contains the listing of every part used.
- Never add components not intended for use with this product.
- Regular maintenance is necessary in this and all park and recreational equipment to insure the safety of the user.
- Note: Proper maintenance of equipment requires regular tightening of all bolts, nuts, and setscrews.
- Note: Regular checking of all parts, castings, etc. should be made. If a part is broken or worn, it should be replaced immediately.
- Check to be sure all fittings are tight and that bars and pipes do not move.
- Replace all worn S-hooks. S-hooks must be completely closed. Failure to close S-hooks can result in serious injury to the user. NEVER reuse S-hooks.
- Test for free movement of swing hanger and other moving attached parts.
- Check for worn chains and replace them.
- A soft resilient surface should be placed under all swings extending at least twice the height of the top rail both front and back.

HARDWARE


3/8" x 4"
Machine Bolt




3/8" x 1"
Machine Bolt




3/8" Washer



3/8" Kep Nut




TOOLS REQUIRED

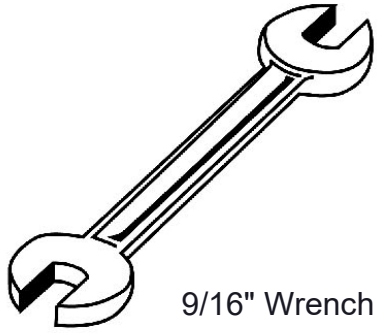


9/16" Wrench



9/16" Socket Wrench
with 4" Extension



Tape Measure

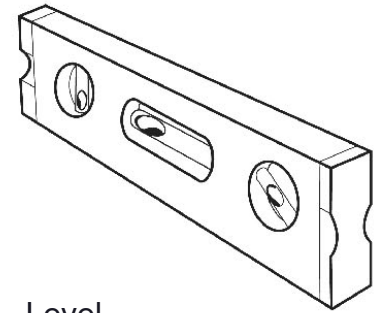

Level

ULTRA SITE PRODUCT SPECIFICATIONS

340SMH-SD6 6' Surface Mount Drink Rail with ADA(Left or Right)

Top: Tops are each fabricated from a single formed 12ga steel plate. 10ga steel plate laser cut understructure with incorporated bag hook. Electrically MIG welded.


Coating: Oven fused functionalized polyethylene copolymer-based thermoplastic. Fluidized bed coating application with superior mechanical performance, impact resistance and UV-stability.

Frame: Left or Right Models. 3" square x 11 gauge pre-galvanized structural steel tubing precision laser cut. 10ga steel plate attachment brackets. Surface Mount Plates are 3/8" steel plate. All electrically MIG welded.



Frame Coating: Electrostatic powder coated application oven cured.

Hardware: All stainless steel hardware fasteners.

Dimensions: 6' surface mount drink rail walk-up design with ADA add-on. 6' Top is 17-1/4" deep x 72" long. ADA Top is 17-1/4" deep x 34-1/2" long. 6' Drink Surface is 14-3/4" x 72" and is 42-3/8" high with a 2-1/8" Backsplash. ADA Drink Surface is 14-3/4" x 34-1/2" and is 30-5/8" high with a 2-1/8" Backsplash. Outside dimensions are 17-1/4" x 104-7/8" x 44-9/16".

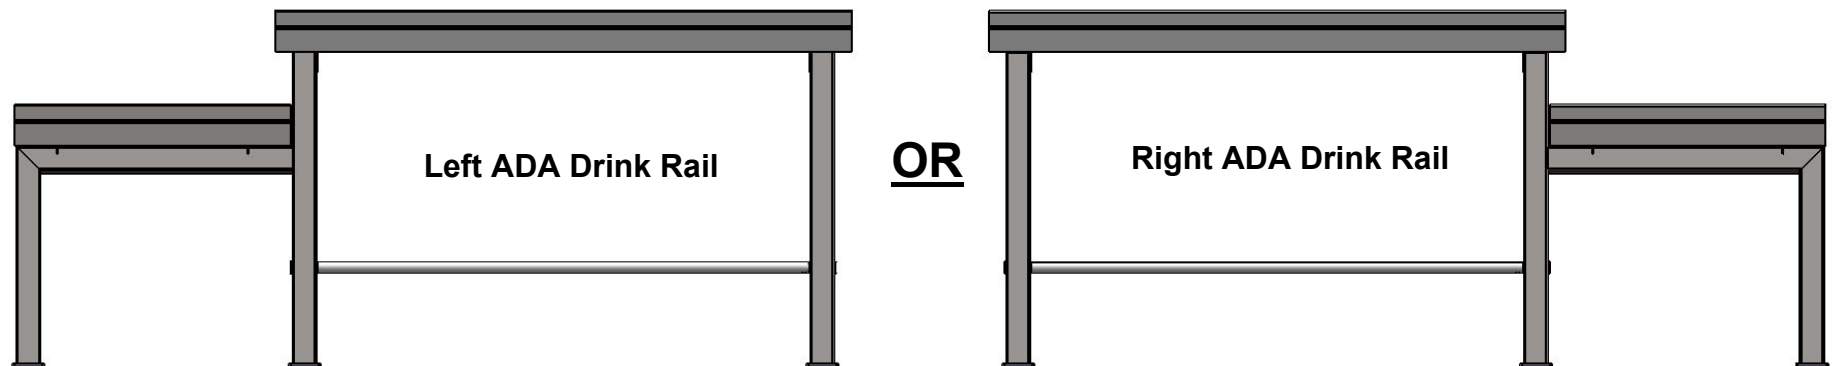


COMPONENTS

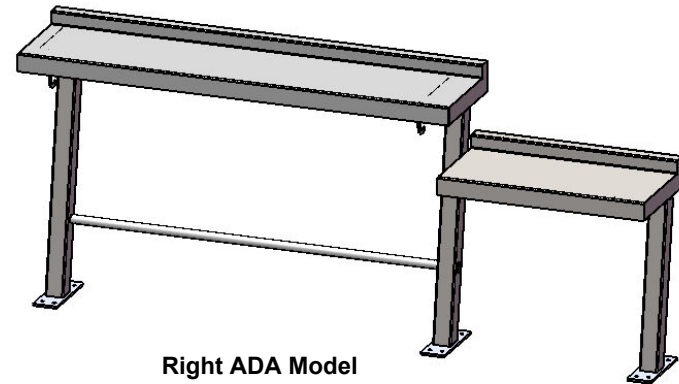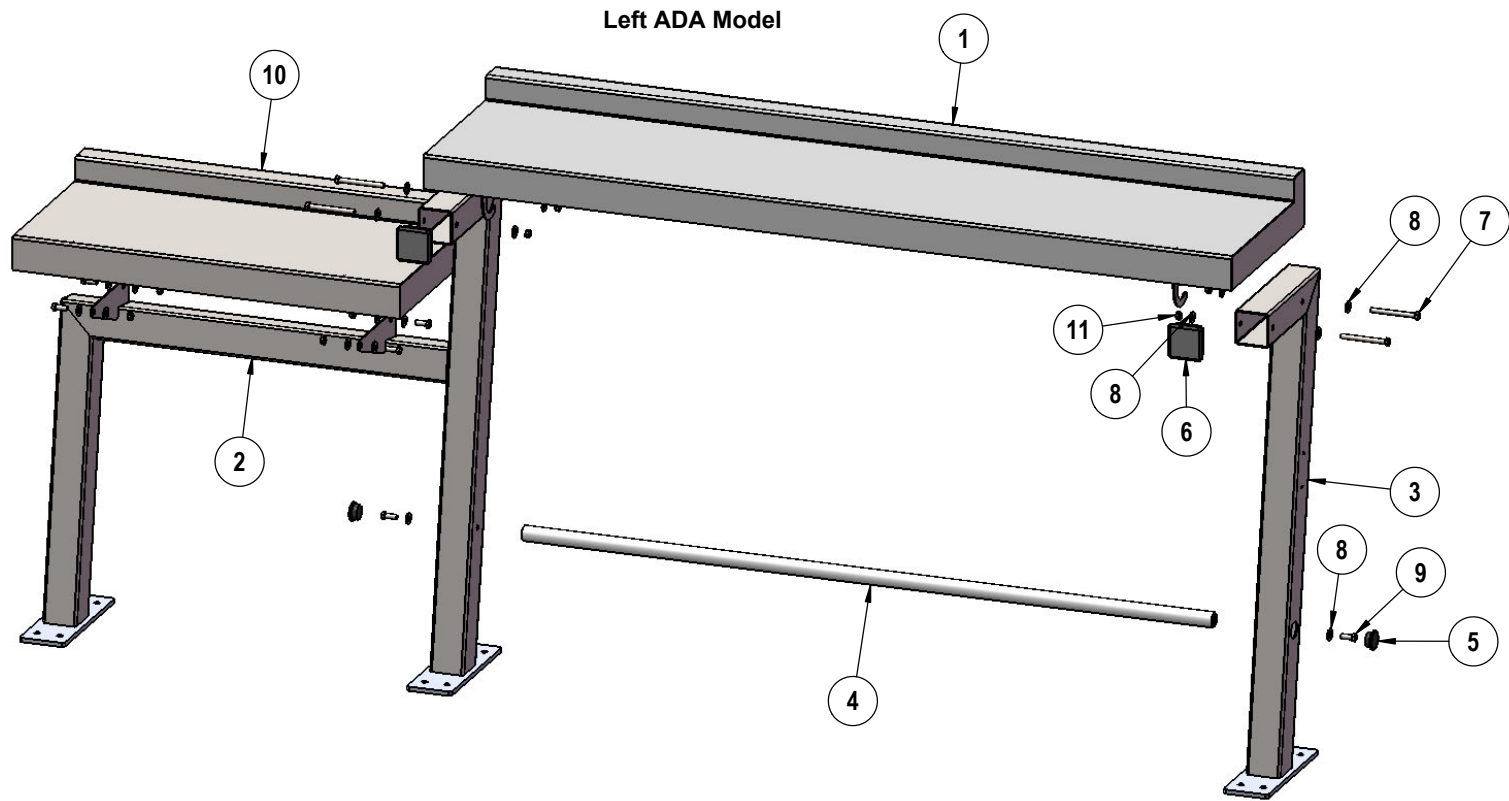


ITEM NO.	PartNo	DESCRIPTION	Qty.
1	01-04-0877	6' Drink Rail Top - Welded	1
2	01-04-0890	ADA Drink Rail Leg Left - Welded	1
3	01-04-0883	Drink Rail Leg Right - Welded	1
4	01-04-0885	Drink Rail Support Pipe - Welded	1
5	33-08-0004	1-5/8" 14-18 ga. round ribbed insert	2
6	HWM0490	Cap Square Ribbed Tube Ins 3" Tube od(10-14ga)black	2
7	33-05-0033	3/8" x 4" Machine Bolt (SS)	4
8	33-02-0008	3/8" Flat Washer (SS)	18
9	33-06-0056	3/8" x 1" Machine Bolt (SS)	6
10	01-04-0887	ADA 34.5" Drink Rail Top - Welded	1
11	33-03-0013	3/8" Kep Nut (SS)	8

STEP 1

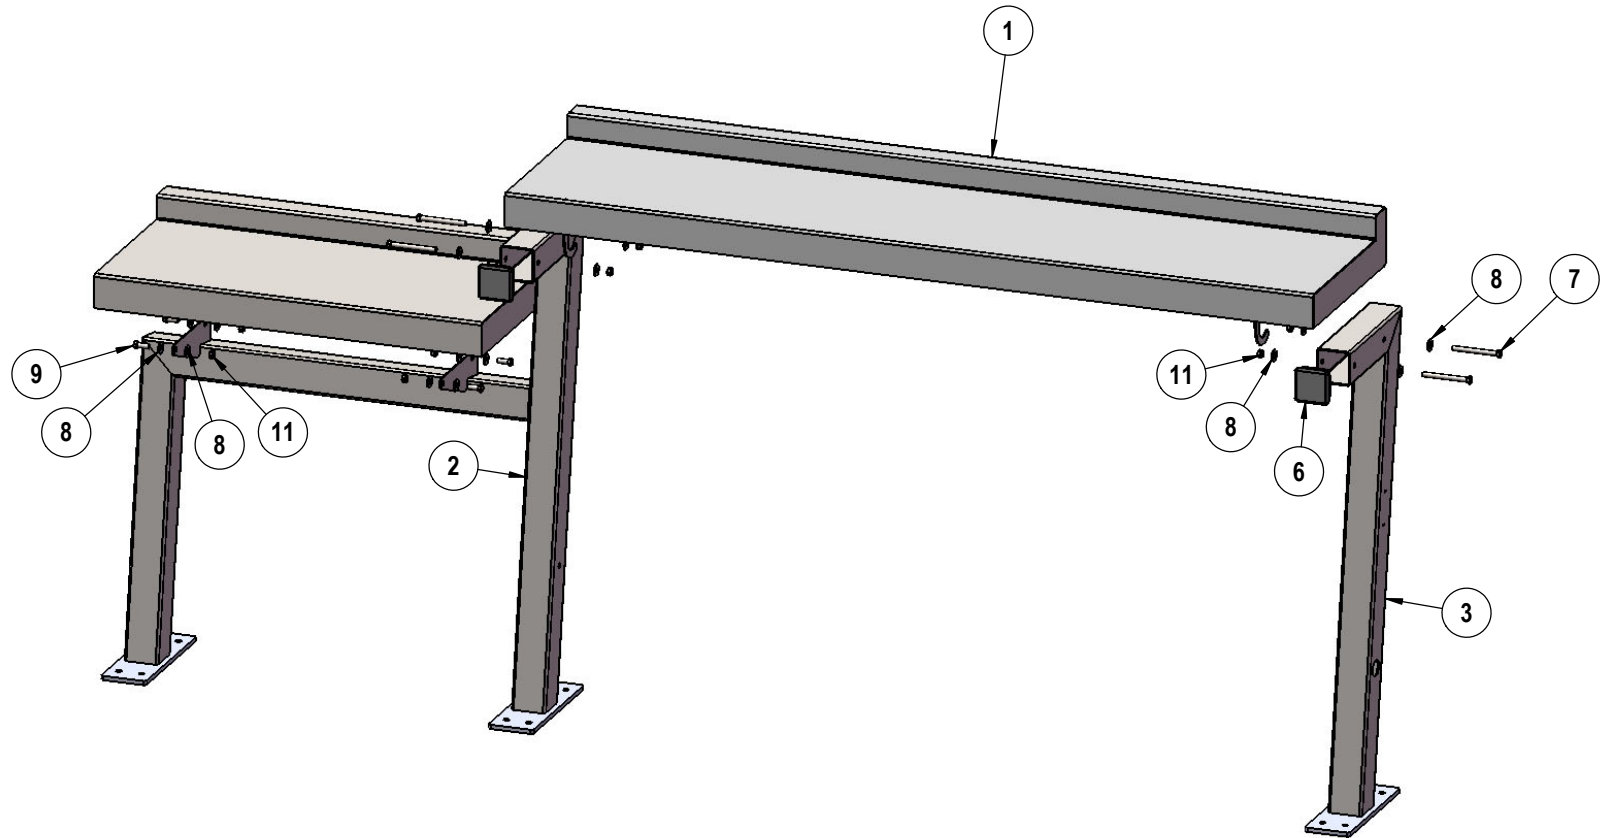

Insert Square Plastic Caps into open end of Drink Rail Legs.
Attach the Drink Rail Legs to the Tops as shown using the
specified hardware.

STEP 2

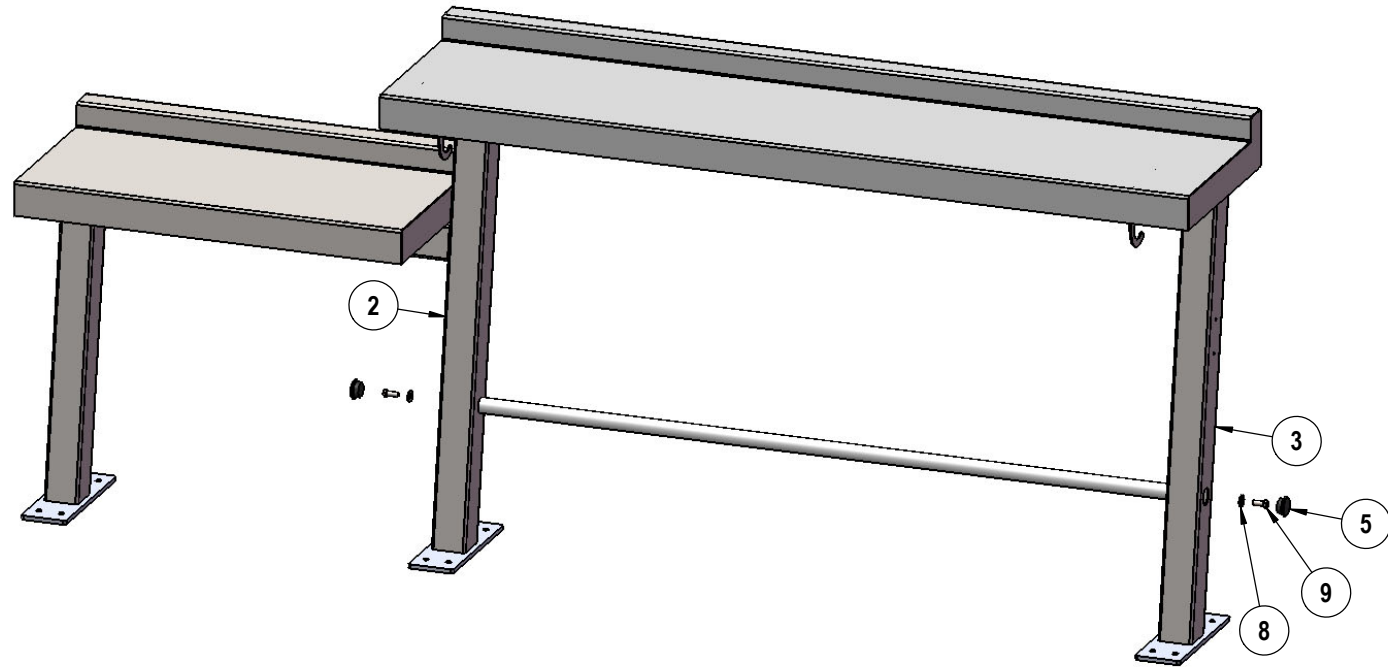

Attach the Support Pipe to the Drink Rail Legs using the specified hardware. Insert Bolt and Washer through the large access hole in legs into the smaller hole in support pipe. Bolts will thread into the threaded insert in the support pipe. Insert the Round Plastic Caps into access hole on outside of Drink Rail Legs.

OVERALL DIMENSIONS

